

Drill Pipe Performance Characteristics Sheet




Pipe Size and Weight: 4 14.00 IU
Pipe Grade: S-135
Range: 2
Tool Joint: 4 7/8 X 2 11/16 PTECH39+

110 Cypress Station
 Suite 160
 Houston, TX 77090, U.S.A
 Phone: (832) 230-8228
 Fax: (281) 741-9914

Pipe Body			
	New-API	New-95%RBW	Premium
OD (in)	4.000	4.000	3.868
Wall Thickness (in)	0.330	0.355	0.264
ID (in)	3.340	3.291	3.340
Calculated Plain End weights (lbs/ft)	12.928	13.804	10.157
Note: Premium properties are calculated based on uniform OD and wall thickness.			
Cross sectional area pipe body (in ²)	3.805	4.063	2.989
Cross sectional area OD (in ²)	12.566	12.566	11.751
Cross sectional area ID (in ²)	8.762	8.504	8.762
Section Modulus (in ³)	3.229	3.406	2.523
Polar Section Modulus (in ³)	6.458	6.812	5.046
	New-API	New-95%RBW	Premium
Torsional Strength (ft-lbs)	41,900	44,200	32,800
Tensile Strength (lbs)	513,600	548,400	403,500
80% Torsional Strength (ft-lbs)	33,500	35,400	26,200
Pressure Capacity (psi)	19,491	20,952	17,820
Collapse Capacity (psi)	20,437	21,822	13,832
Tool Joint			
PTECH+ CONNECTION		PTECH39+	
	OD (in)	4 7/8	
	ID (in)	2 11/16	
Tool Joint with a Material Yield Strength of 135000 psi			
	Pin Tong length (in)	13	
	Box Tong length (in)	15	
	Torsional Strength (ft-lbs)	38,840	
	Max Recommended Make-up Torque (ft-lbs)	23,300	
	Min Recommended Make-up Torque (ft-lbs)	18,300	
	Balance OD (in)	4.888	
	Tensile Strength (lbs)	732,800	
	Tool joint/Drill pipe torsional ratio (New pipe)	0.93	
	Tool joint/Drill pipe torsional ratio (95% New pipe)	0.88	
	Tool joint/Drill pipe torsional ratio (Prem pipe)	1.18	
	Min OD for premium class (in)	4.531	
Minimum make-up is based on shoulder separation caused by bending.			
Drill Pipe Assembly with PTECH+ Tool Joint		Drill Pipe Bend Radius	
API Adjusted weight (lbs/ft)	15.78	* These calculations are based on new pipe with nominal wall Based on Bending Stress (psi) at Pipe OD 15,000 Radius of Curvature (R) (ft.) (@ OD of pipe) 333.3 BUR (dogleg) deg/100 ft. 17.2	
95% Adjusted weight (lbs/ft)	16.59		
Approximate length (ft)	31.69		
95% Fluid Displacement (gal/ft)	0.254		
API Fluid Displacement (gal/ft)	0.241		
Fluid Capacity (gal/ft)	0.436		
Drift Size	2.563		

TORQUE TENSION COMBINED LOAD CURVE

For PTECH39+ 4 7/8 X 2 11/16 Tool Joint with a Material Strength of 135000 psi, using a Coefficient of Friction factor of 0.08 and a Safety Factor of 1.0. On Pipe: 4 14.00 S-135 Premium Class.

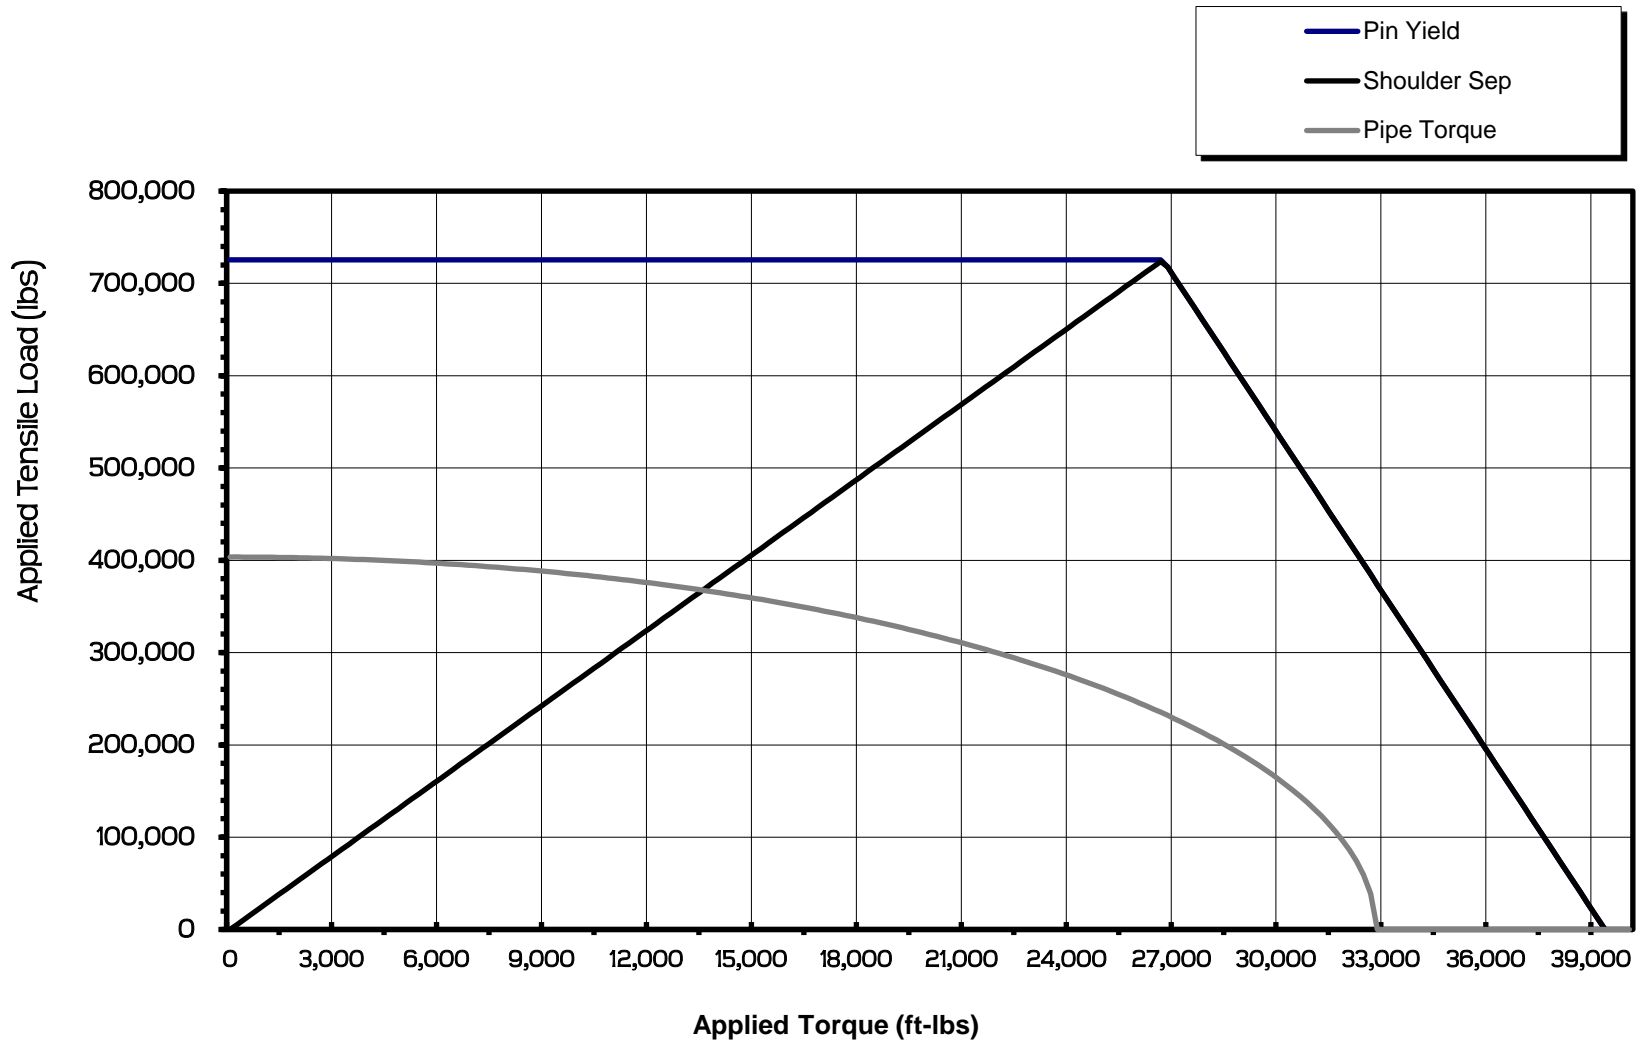

PTECH39+ 4 7/8 X 2 11/16 TOOL JOINT OD WEAR CURVE

