

Drill Pipe Performance Characteristics Sheet



Patents: 9,885,214 9,493,993
Pipe Size and Weight: 2 3/8 6.65 EU
Pipe Grade: S-135
Range: 2
Tool Joint: 3 1/16 X 1 1/2 PTECH23+

110 Cypress Station
 Suite 110
 Houston, TX 77090, U.S.A
 Phone: (832) 230-8228
 Fax: (281) 741-9914

Revision 7 12/2/2021


Pipe Body			
	New-API	New-95%RBW	Premium
OD (in)	2.375	2.375	2.263
Wall Thickness (in)	0.280	0.301	0.224
ID (in)	1.815	1.773	1.815
Calculated Plain End weights (lbs/ft)	6.262	6.664	4.876
Note: Premium properties are calculated based on uniform OD and wall thickness.			
Cross sectional area pipe body (in ²)	1.843	1.961	1.435
Cross sectional area OD (in ²)	4.430	4.430	4.022
Cross sectional area ID (in ²)	2.587	2.469	2.587
Section Modulus (in ³)	0.867	0.907	0.667
Polar Section Modulus (in ³)	1.733	1.813	1.334
	New-API	New-95%RBW	Premium
Torsional Strength (ft-lbs)	11,300	11,800	8,700
Tensile Strength (lbs)	248,800	264,800	193,700
80% Torsional Strength (ft-lbs)	9,000	9,400	7,000
Pressure Capacity (psi)	27,853	29,942	25,465
Collapse Capacity (psi)	28,079	29,882	24,080

Tool Joint			
PTECH+		PTECH23+	
CONNECTION		OD (in)	3 1/16
		ID (in)	1 1/2
Tool Joint with a Material Yield Strength of 135000 psi			
		Pin Tong length (in)	11
		Box Tong length (in)	14
		Friction Factor	1.0 1.15
		Torsional Strength (ft-lbs)	9,860 11,300
		Severe Service Recommended Make-up Torque (ft-lbs) [70%]	6,900 7,900
		Standard Service Recommended Make-up Torque (ft-lbs) [60%]	5,900 6,800
		Min Recommended Make-up Torque (ft-lbs)	5,300 6,100
		Balance OD (in)	3.041
		Tensile Strength (lbs)	269,700
		Tool joint/Drill pipe torsional ratio (New pipe)	0.87
		Tool joint/Drill pipe torsional ratio (95% New pipe)	0.84
		Tool joint/Drill pipe torsional ratio (Prem pipe)	1.13
		Min OD for premium class (in)	2.843

Drill Pipe Assembly with PTECH+ Tool Joint	Drill Pipe Bend Radius																				
<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 70%;">API Adjusted weight (lbs/ft)</td> <td style="text-align: right;">7.22</td> </tr> <tr> <td>95% Adjusted weight (lbs/ft)</td> <td style="text-align: right;">7.60</td> </tr> <tr> <td>Approximate length (ft)</td> <td style="text-align: right;">31.50</td> </tr> <tr> <td>95% Fluid Displacement (gal/ft)</td> <td style="text-align: right;">0.116</td> </tr> <tr> <td>API Fluid Displacement (gal/ft)</td> <td style="text-align: right;">0.110</td> </tr> <tr> <td>Fluid Capacity (gal/ft)</td> <td style="text-align: right;">0.130</td> </tr> <tr> <td>Drift Size</td> <td style="text-align: right;">1.375</td> </tr> </table>	API Adjusted weight (lbs/ft)	7.22	95% Adjusted weight (lbs/ft)	7.60	Approximate length (ft)	31.50	95% Fluid Displacement (gal/ft)	0.116	API Fluid Displacement (gal/ft)	0.110	Fluid Capacity (gal/ft)	0.130	Drift Size	1.375	<p>* These calculations are based on new pipe with nominal wall</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 70%;">Based on Bending Stress (psi) at Pipe OD</td> <td style="text-align: right;">15,000</td> </tr> <tr> <td>Radius of Curvature (R) (ft.) (@ OD of pipe)</td> <td style="text-align: right;">197.9</td> </tr> <tr> <td>BUR (dogleg) deg/100 ft.</td> <td style="text-align: right;">29.0</td> </tr> </table>	Based on Bending Stress (psi) at Pipe OD	15,000	Radius of Curvature (R) (ft.) (@ OD of pipe)	197.9	BUR (dogleg) deg/100 ft.	29.0
API Adjusted weight (lbs/ft)	7.22																				
95% Adjusted weight (lbs/ft)	7.60																				
Approximate length (ft)	31.50																				
95% Fluid Displacement (gal/ft)	0.116																				
API Fluid Displacement (gal/ft)	0.110																				
Fluid Capacity (gal/ft)	0.130																				
Drift Size	1.375																				
Based on Bending Stress (psi) at Pipe OD	15,000																				
Radius of Curvature (R) (ft.) (@ OD of pipe)	197.9																				
BUR (dogleg) deg/100 ft.	29.0																				

TORQUE TENSION COMBINED LOAD CURVE

For PTECH23+ 3 1/16 X 1 1/2 Tool Joint with a Material Strength of 135000 psi, using a Coefficient of Friction factor of 0.08 and a Safety Factor of 1.0. On Pipe: 2.375 6.65 S-135 Premium Class.

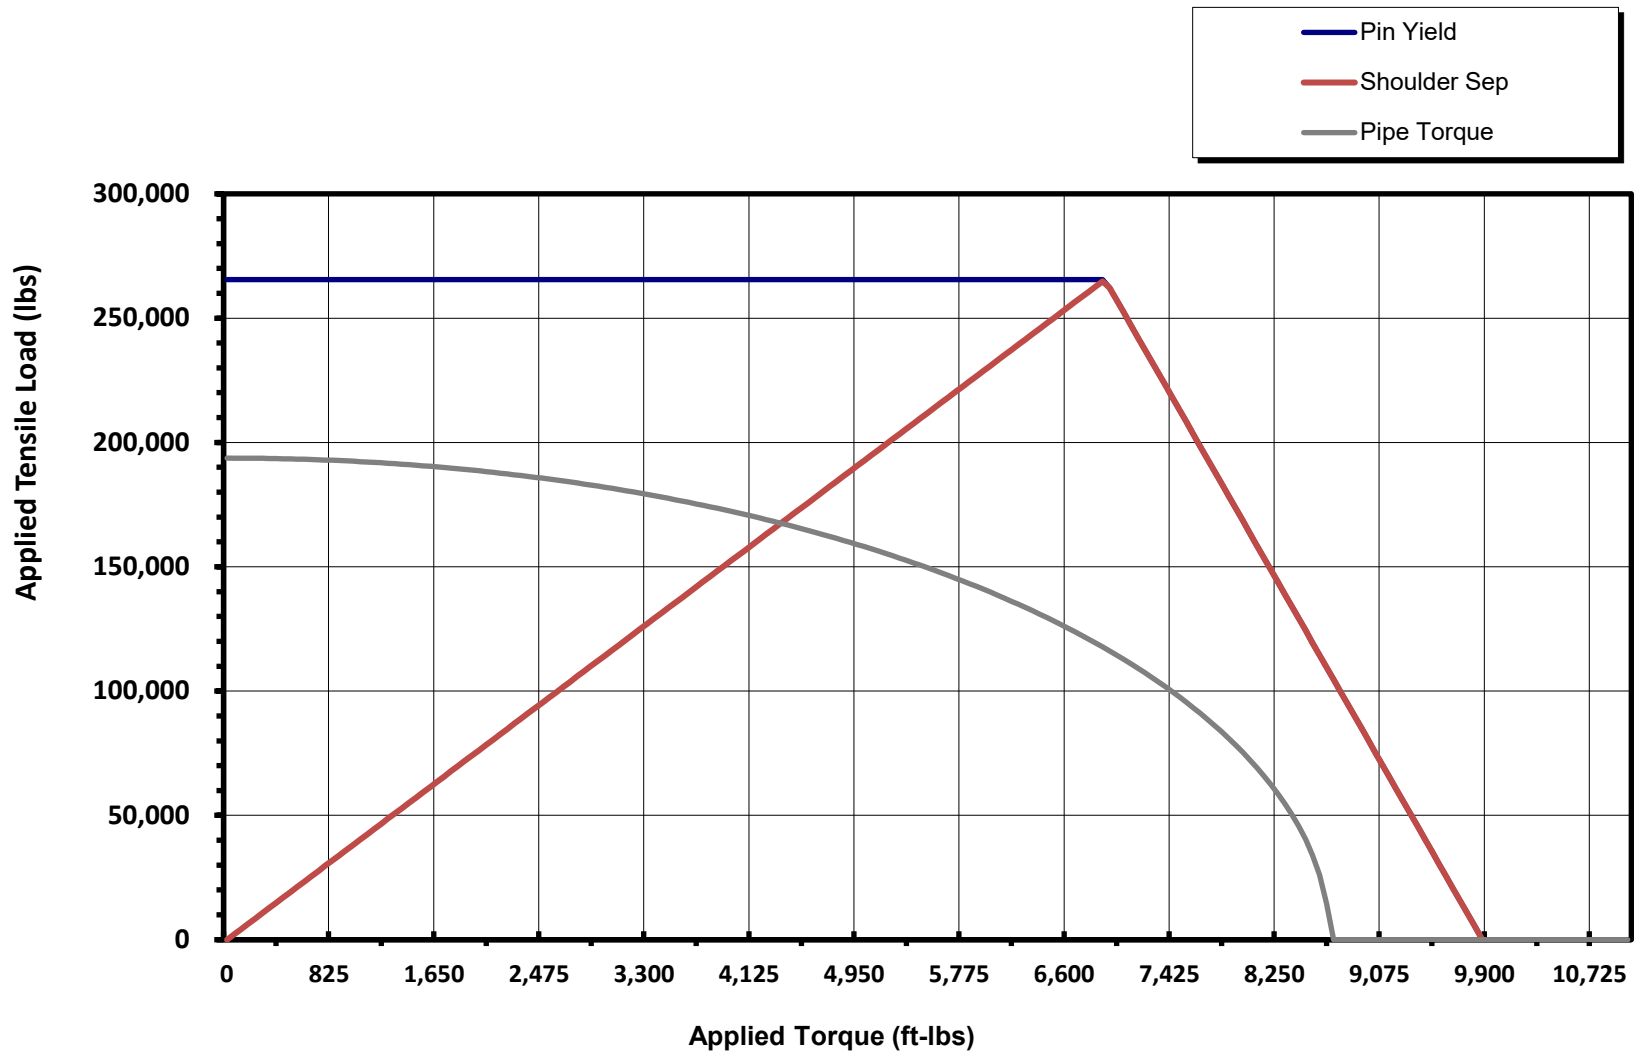

PTECH23+ 3 1/16 X 1 1/2 TOOL JOINT OD WEAR CURVE

